
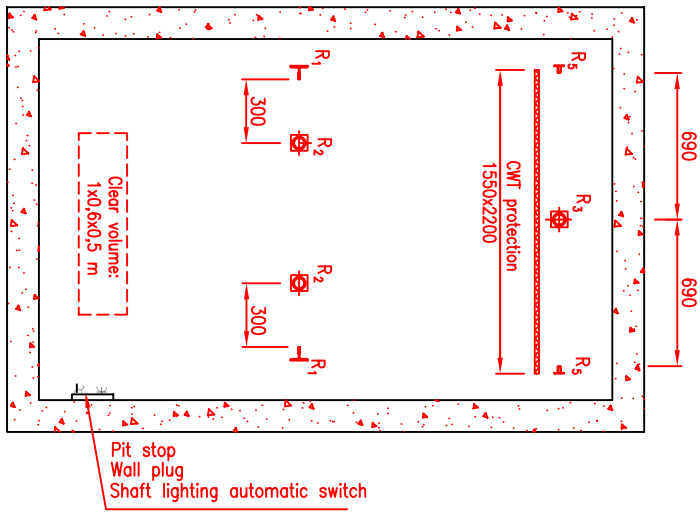
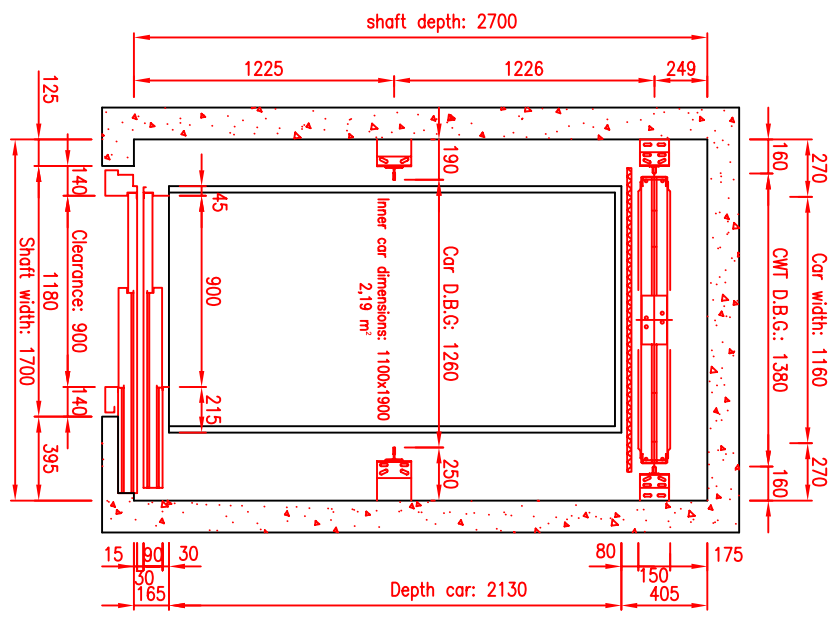


VERTICAL SECTION

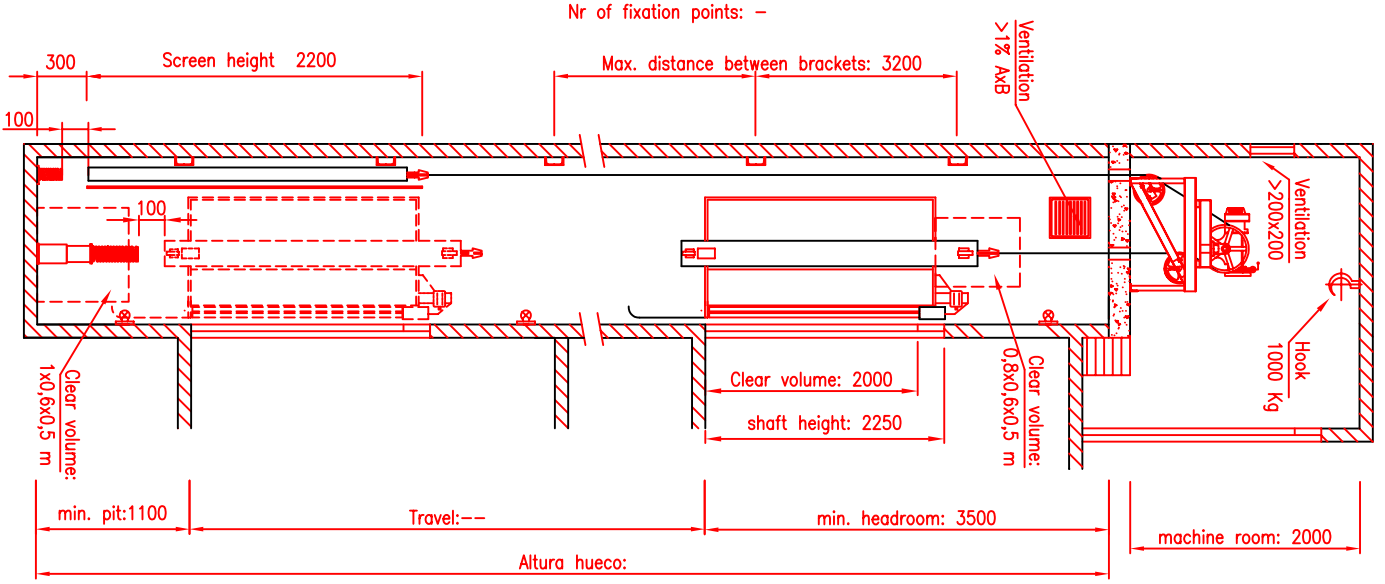

CHARACTERISTICS	
LOAD (Q):	1000Kg
CAR WEIGHT (P):	1195 Kg
TOTAL WEIGHT (P+Q):	2195 Kg
PERSONS:	13
RATED SPEED:	1/0,25 m/s
TRAVEL:	----- mm
STOPS:	-
MACHINE DENOMINATION:	-----
TRACTION PULLEY:	ø570
DEFLECTION PULLEY:	2ø400
SUSPENSION:	1:1
ROPES:	6x10ø
OVERSPEED GOV. ROPE:	ø6
CAR GUIDE RAIL:	90/75/16
CWT GUIDE RAIL:	65/54/8
CAR SAFETY GEAR:	FELESA PR-2500 UD
CWT SAFETY GEAR:	FELESA PI-30
CAR BUFFER:	2ø125x80
CWT BUFFER:	2ø100x80
MACHINE POWER:	20 CV
POWER VOLTAGE:	380 V
LIGHTING VOLTAGE:	220 V
PHASES:	3
NOMINAL CURRENT:	32 A
START CURRENT:	106 A
CONTROLLER:	-----
R1:	24.270 N
R2:	40.359 N
R3:	30.548 N
R4:	11.234 N
R5:	24.363 N

Date		Modification		Subs. Draw N°:		Replaced by:		Ed.:0	
N° OF PIECES		DENOMINATION		POS. MATERIAL WEIGHT		DRAWING		CUSTOMER	
4	3	2	1	2008	Date:	Name:	-----		
GROUP		DRAWN:		CHECKED:		-----			
Scale:		Traction lift 1000Kg		FABRICATION DE ELEVADES SL		-----			