
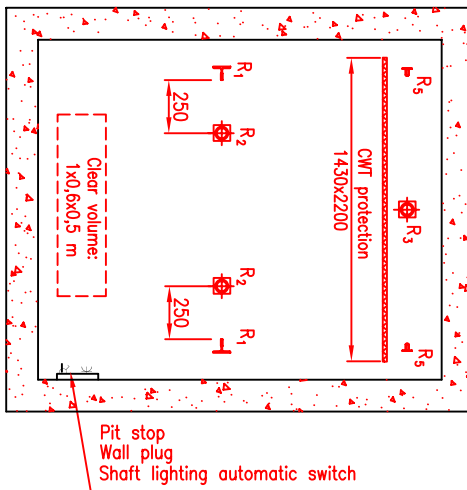
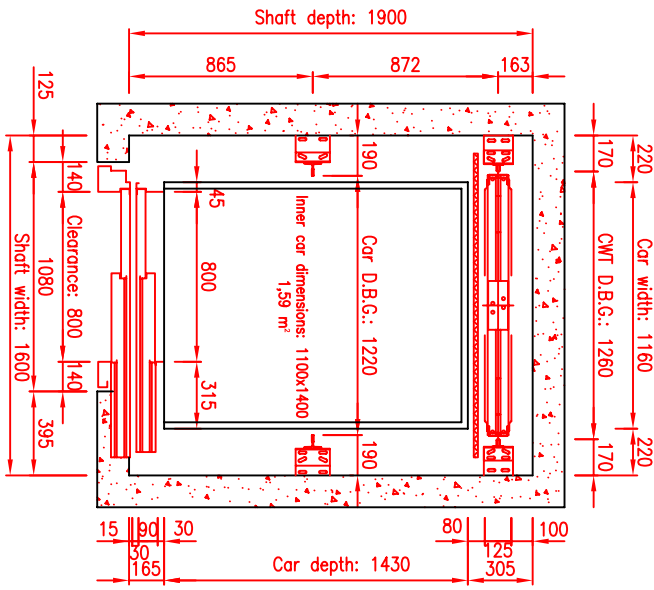


VERTICAL SECTION

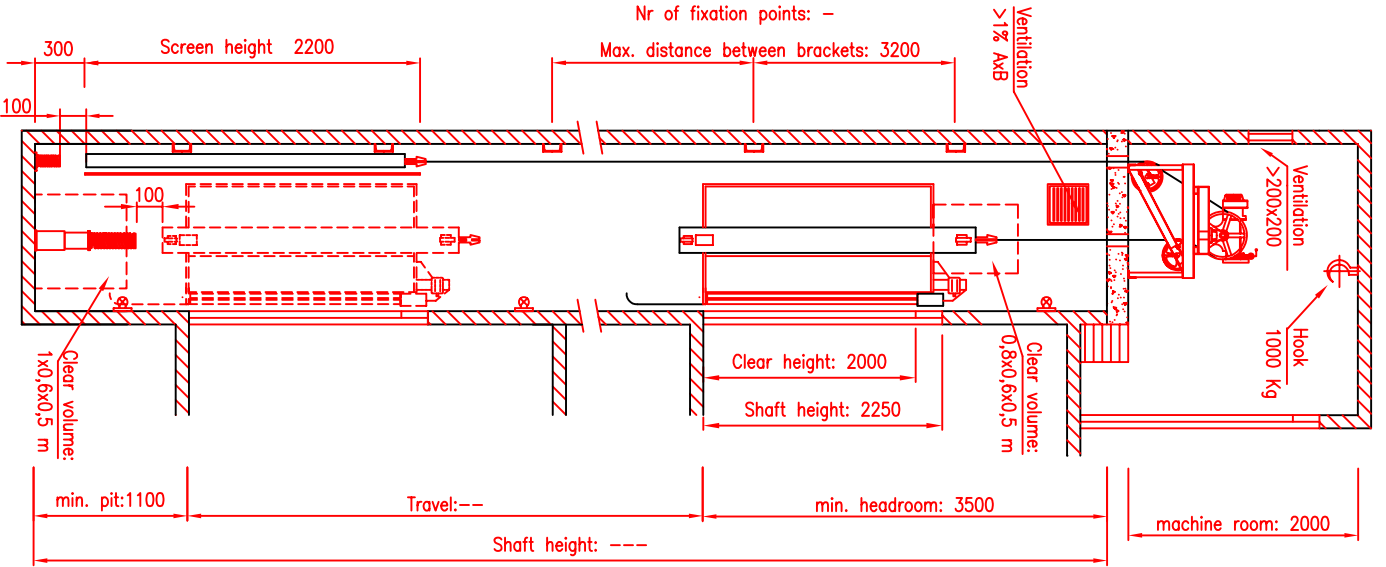

CHARACTERISTICS	
LOAD (Q):	600kg
CAR WEIGHT (P):	520 Kg
TOTAL WEIGHT (P+Q):	1120 Kg
PERSONS:	8
RATED SPEED:	1/0,25 m/s
TRAVEL:	----- mm
STOPS:	-
MACHINE DENOMINATION:	-----
TRACION PULLEY:	ø500
DEFLECTION PULLEY:	ø400
SUSPENSION:	1:1
ROPES:	4x8ø
OVERSPEED GOV. ROPE:	ø6
CAR GUIDE RAIL:	82/88/9
CMT GUIDE RAIL:	45/35/15
CAR SAFETY GEAR:	F2S
CMT SAFETY GEAR:	FI-12
CAR BUFFER:	ø125x80
CMT BUFFER:	ø100x80
MACHINE POWER:	7,5 CV
POWER VOLTAGE:	380 V
LIGHTING VOLTAGE:	220 V
PHASES:	3
NOMINAL CURRENT:	14,2 A
START CURRENT:	24,7 A
CONTROLLER:	-----
R1:	13,783 N
R2:	44,656 N
R3:	32,884 N
R4:	617 N
R5:	-----

Nº OF PIECES		DENOMINATION		POS. MATERIAL WEIGHT		DRAWING	
4	3	2	1	2008	Date:	2008	Name:
GROUP		CUSTOMER		Checked: 18-10		Drawn: 18-10	
Date		Modification		Subs. Draw Nº:		Replaced by:	
Scale:		S:1		Traction lift 600Kg		Falesa	
Ed.0		FABRICATION DE ELEVADORES SL.		-----		-----	