
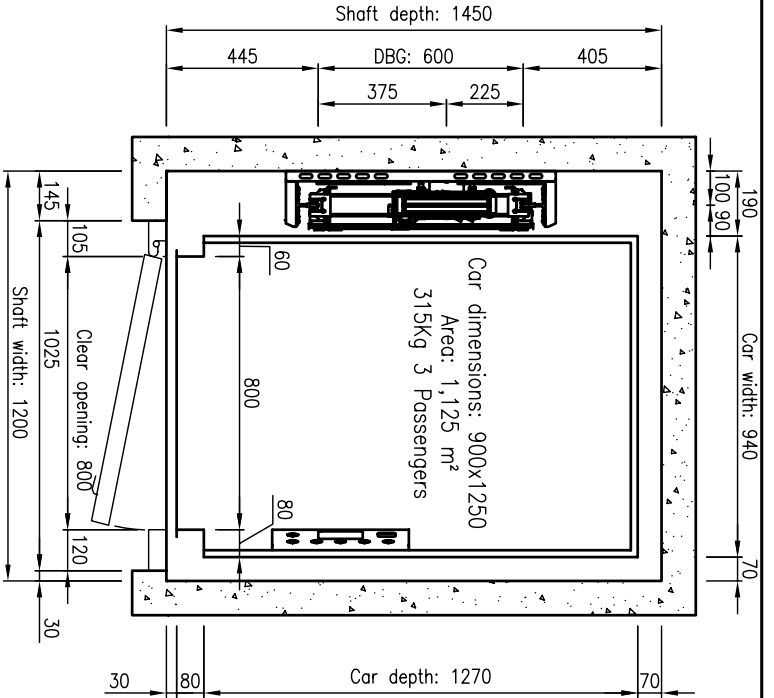
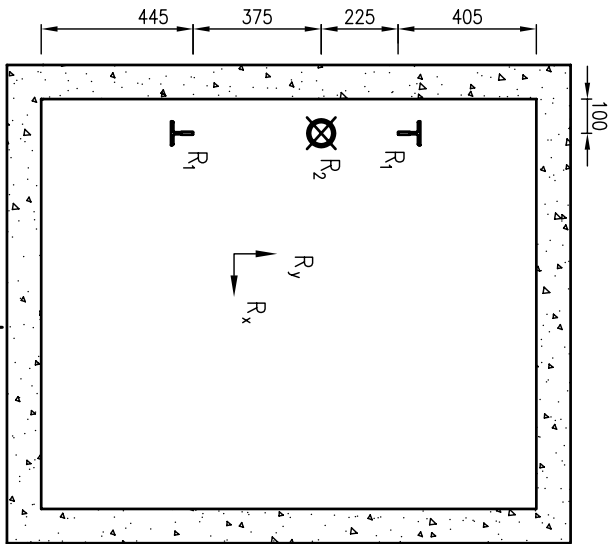


\*Distance between the higher part of the head pulley and the shaft roof

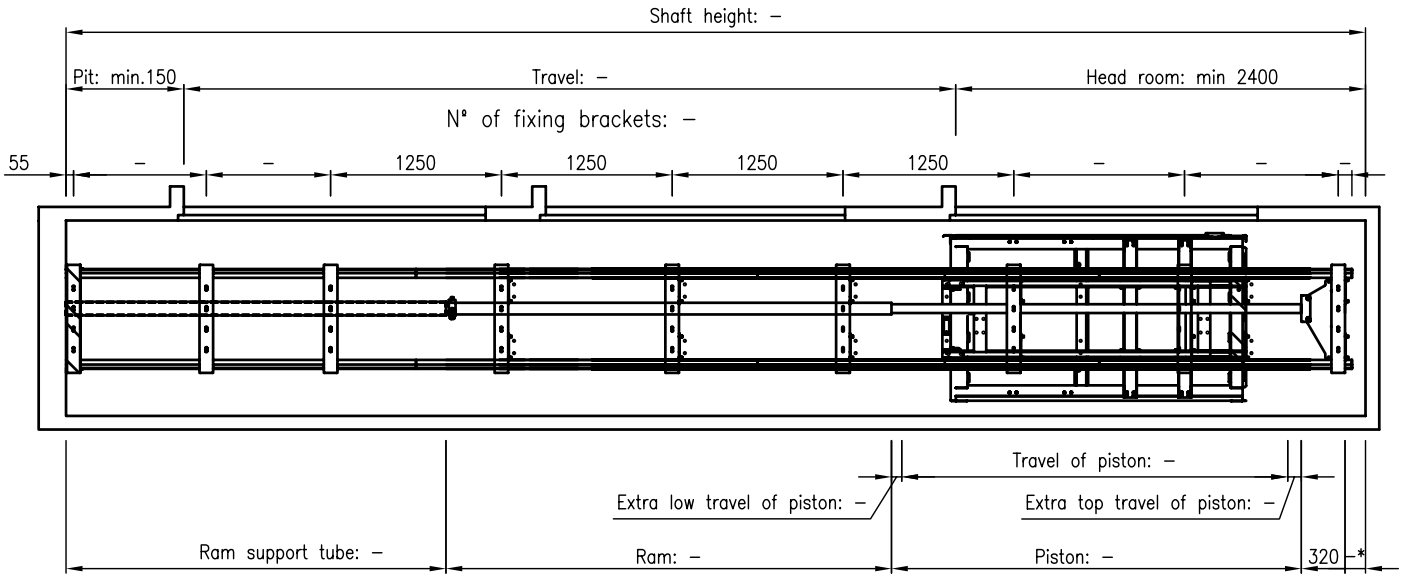

Date	Modification

N° OF PIECES	DENOMINATION	POS. MATERIAL	WEIGHT	DRAWING
4	Date	Name		
3	Drawn			
2				
1				
CUSTOMER				
Scale: <b>S-E</b> <b>315Kg 3Passengers (Handic.)</b>				
SHAFT LAYOUT				
FABRICATION DE ELEVADES S.L.				
Subs. Draw N°				Replaced by:
Ed:0				

CHARACTERISTICS	
LOAD:	315 Kg
PASSENGERS:	3
RATED SPEED:	0,15 m/s
TRAVEL:	- mm
STOPS:	-
ACTING:	2:1
HEAD PULLEY:	ø250
TRACTION ROPES:	2xø6
CAR GUIDES:	67 (70/65/9)
CAR SAFETY GEAR:	P1-12
PISTON:	65/7,5
HYDRAULIC EQUIPMENT:	GMW HL6000
MOTOR POWER:	3 Cv
PUMP FLOW:	15 l/min
START:	DIRECT
NOMINAL CURRENT:	18 A
START CURRENT:	58 A
R1:	12.000 N
R2:	19.000 N
Rx:	4.000 N
Ry:	1.100 N