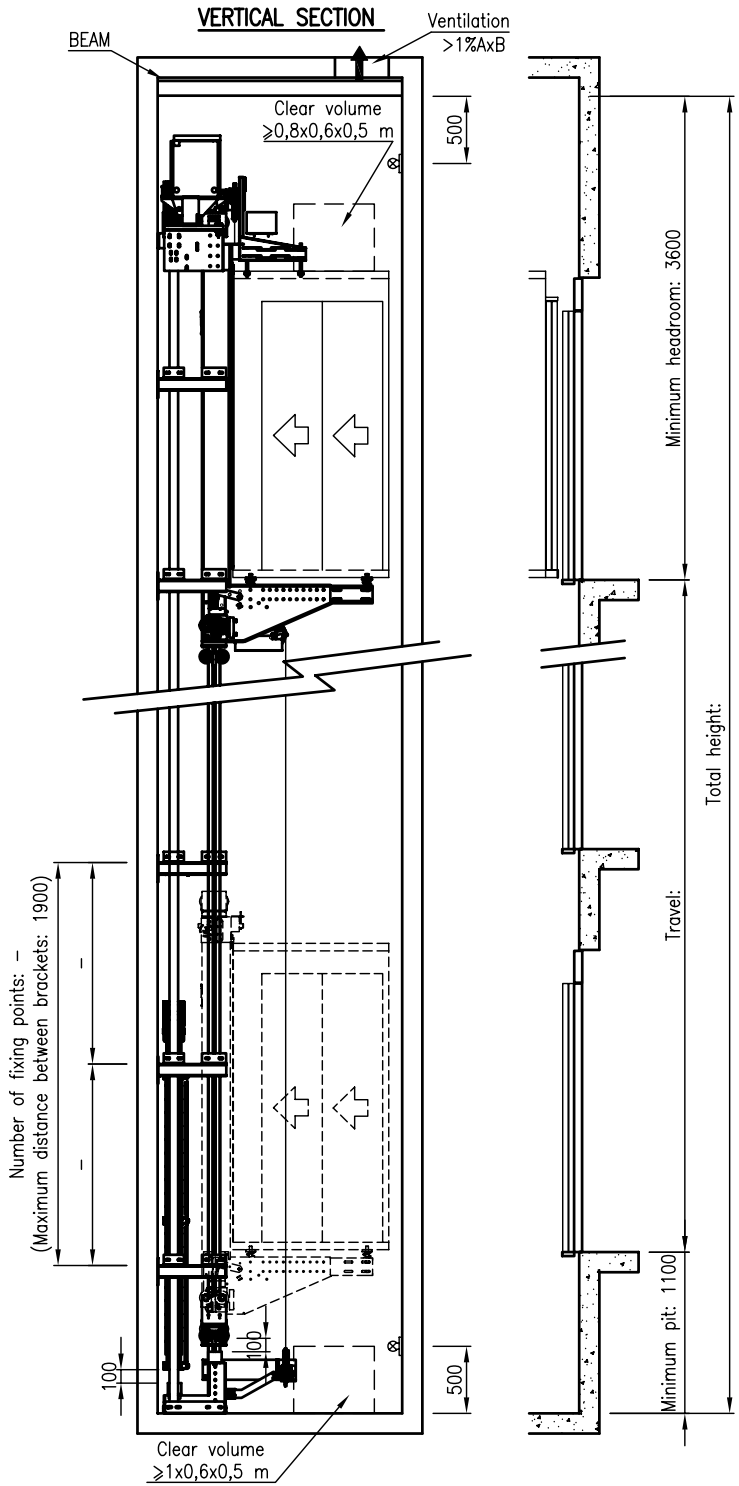

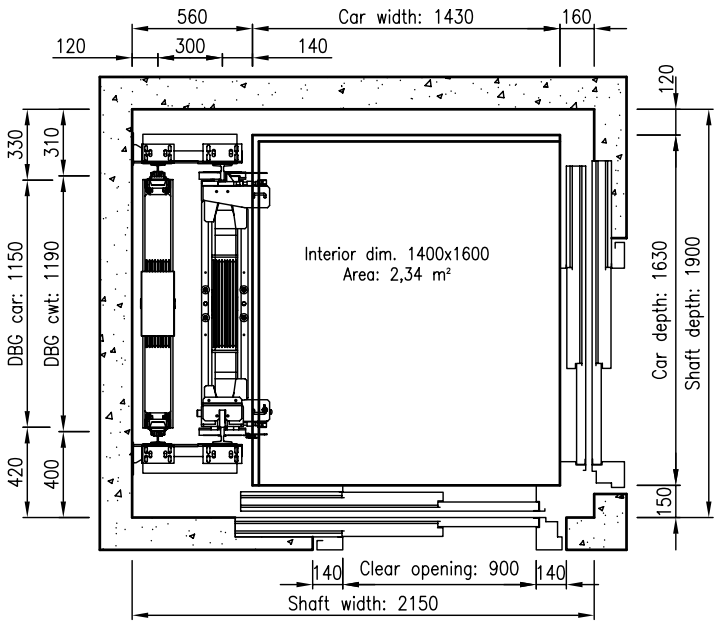

SHAFT PLAN

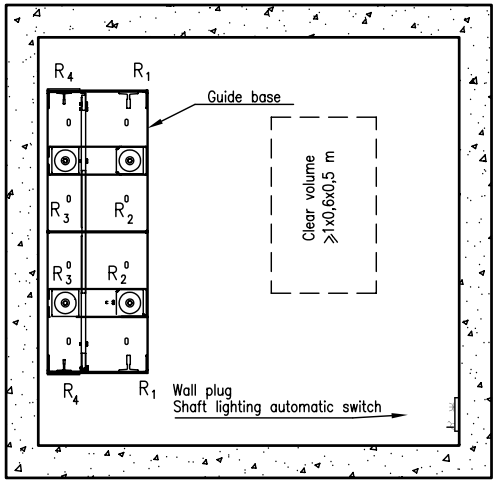

PIT

CHARACTERISTICS	
LOAD:	1000 Kg
PERSONS:	13
RATED SPEED	1 m/s VF
TRAVEL:	– mm
FLOORS:	–
SEQUENCE:	–
MACHINE DENOMINATION:	DIANA-10-1000-2S
TRACTION PULLEY:	ø330
DEFLECTION PULLEY:	ø400
SUSPENSION:	2:1
TRACTION ROPES:	6xø8
OVERSPEED GOV. ROPE:	ø6
CWT GUIDE RAIL:	65/54/8
CAR GUIDE RAIL:	90/75/16
CWT SAFETY GEAR: (if required)	–
CAR SAFETY GEAR	F2S
CAR BUFFER(2):	ø100/80
CWT BUFFER(2):	ø100/80
MACHINE POWER:	9,6 CV
POWER VOLTAGE:	380 V
LIGHTING VOLTAGE:	220 V
PHASES:	3
NOMINAL CURRENT:	14,2 A
START CURRENT	14,2 A
R1:	28.042 N
R2:	41.202 N
R3:	31.392 N
R4:	19.208 N

N° OF PIECES				DENOMINATION			POS.	MATERIAL	WEIGHT	DRAWING
4	3	2	1	2008	Date:	Name:	CUSTOMER			
GROUP				Drawn:	20-10	VGM	–			
				Checked:	20-10					

FELESA FABRICACION DE ELEVADORES S.L.

Scale: S:E

GRL 1000

1-2/-

Subs. Draw N°: Replaced by: Ed.:0

E/05.07 Edición:1