



VERTICAL SECTION

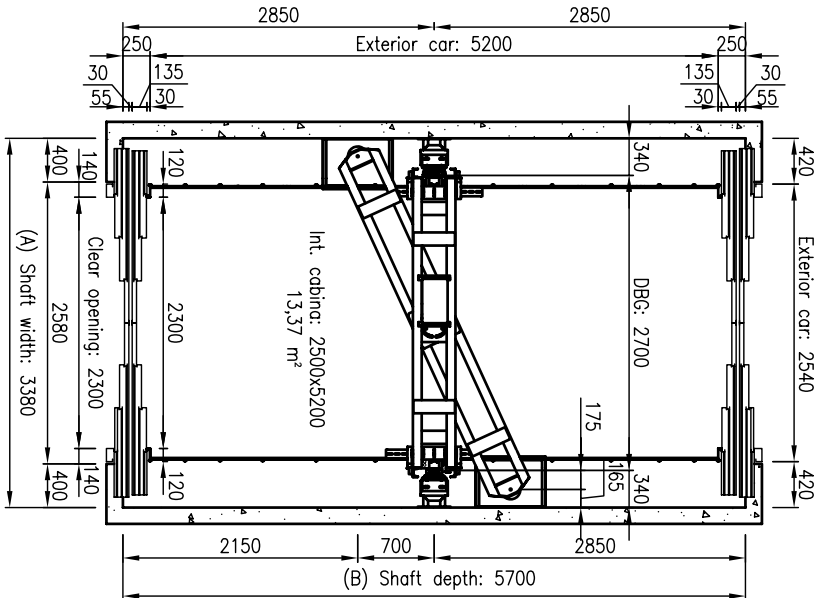

SHAFT PLAN

FLOOR -

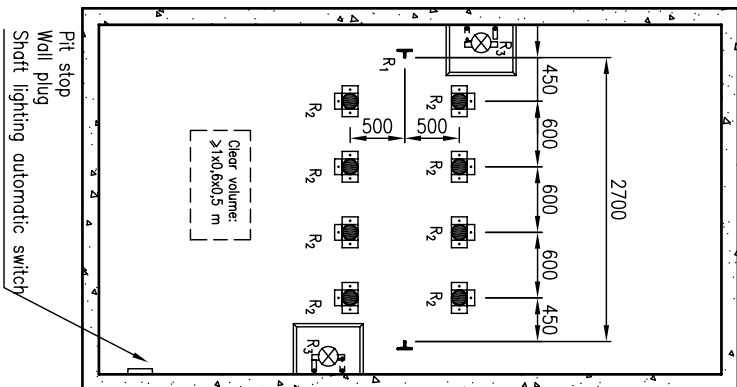

PIT

CHARACTERISTICS	
LOAD:	4000 Kg
PERSONS:	53
RATED SPEED:	- m/s
TRAVEL:	- mm
HEAD ROOM:	- mm
PIT:	- mm
STOPS:	-
FLOORS:	-
HYDRAULIC EQUIPMENT:	GMV
PISTON: (2)	-
ACTING:	1:1
CAR GUIDE RAIL:	125/82/16
CAR BUFFERS: (4)	Ø100x80
MOTOR POWER:	- CV
PUMP FLOW:	- L/min
START:	
POWER VOLTAGE:	380 V
LIGHTING POWER:	240 V
PHASES:	3
NOMINAL CURRENT:	- A
START CURRENT:	- A
PIPE: (2)	-
PIPE:	-
CONTROLLER:	-
R1:	69.677 N
R2:	32.864 N
R3:	71.187 N

Date		Modification	
Subs. Draw N°		Replaced by:	
Ed.-0			
Scale: S/E		SHAFT LAYOUT	
Car 2Acc. 180° 2500x5200		CUSTOMER	
FABRICACION DE ELEVADORES S.L.		DRAWING	
FALSA		FALSA	
N° OF PIECES		DENOMINATION	
GROUPS		POS. MATERIAL WEIGHT	
Date		Name	
Drawn		Date	
V²B°		Date	
4		3	
3		2	
2		1	
1		1	