
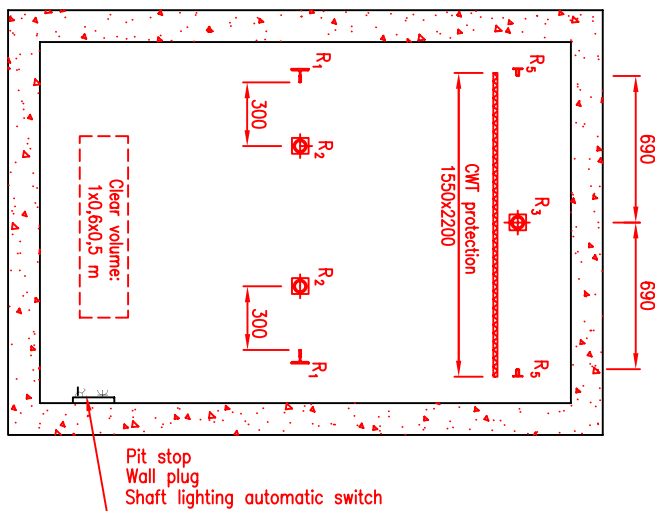
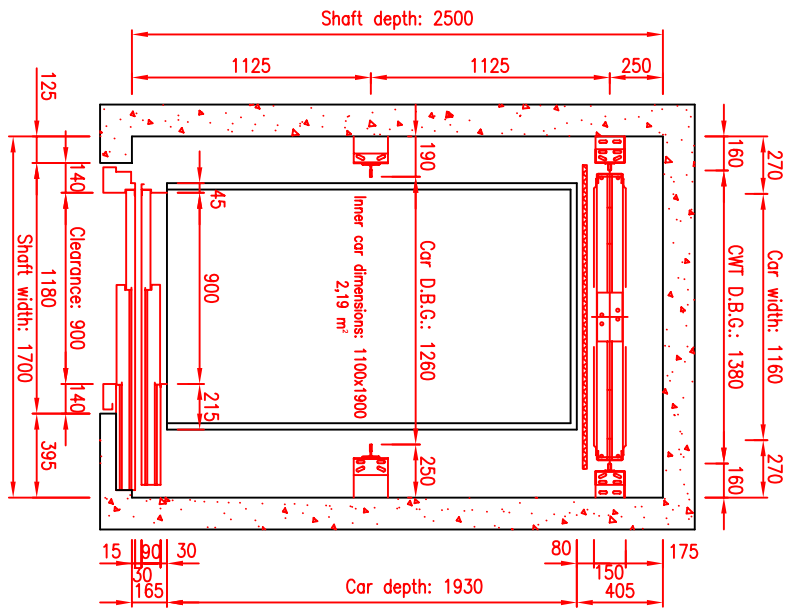


VERTICAL SECTION

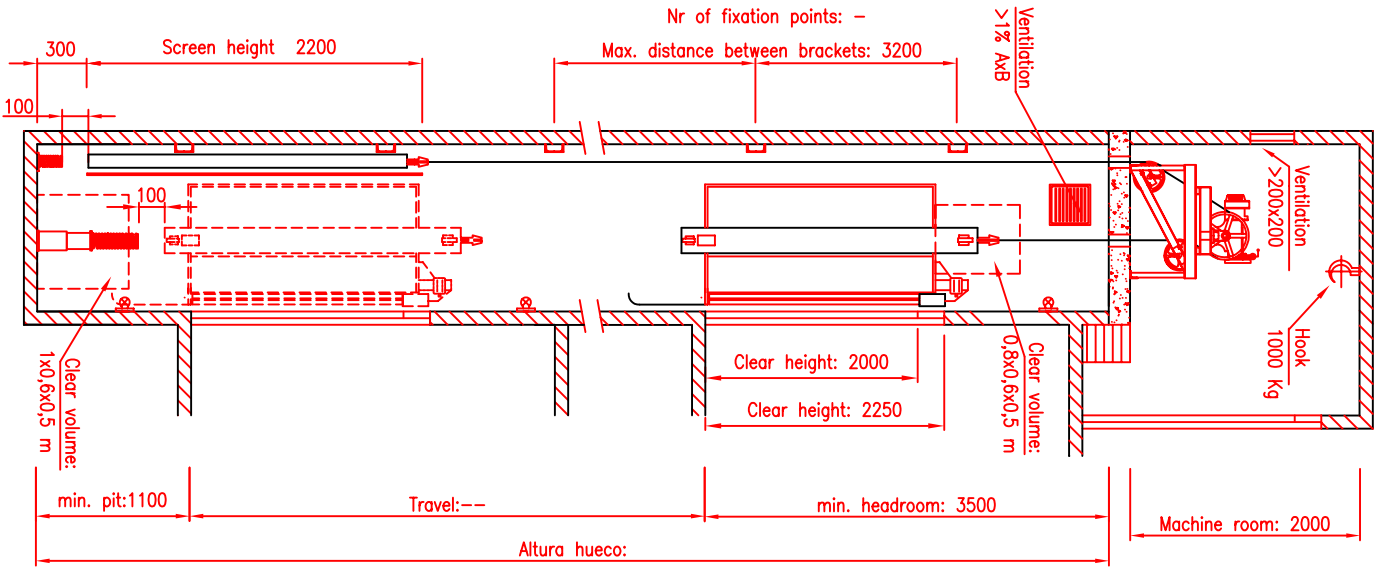

CHARACTERISTICS	
LOAD (Q):	900Kg
CAR WEIGHT (P):	1125 Kg
TOTAL WEIGHT (P+Q):	2025 Kg
PERSONS:	12
RATED SPEED:	1/0,25 m/s
TRAVEL:	----- mm
STOPS:	-
MACHINE DENOMINATION:	-----
TRACTION PULLEY:	ø570
DEFLECTION PULLEY:	2xø400
SUSPENSION:	1:1
ROPES:	6x10ø
OVERSPEED GOV. ROPE:	ø6
CAR GUIDE RAIL:	90/75/16
CWT GUIDE RAIL:	65/54/8
CAR SAFETY GEAR:	DAUMERIE PR-2500 UD
CWT SAFETY GEAR:	FELESA PI-30
CAR BUFFER:	2xø100x80
CWT BUFFER:	2xø100x80
MACHINE POWER:	15 CV
POWER VOLTAGE:	380 V
LIGHTING VOLTAGE:	220 V
PHASES:	3
NOMINAL CURRENT:	27 A
START CURRENT:	89 A
CONTROLLER:	-----
R1:	22.288 N
R2:	36.396 N
R3:	27.586 N
R4:	10.367 N
R5:	22.146 N

DENOMINATION		POS. MATERIAL WEIGHT		DRAWING	
Nº OF PIECES	4 3 2 1	2008	Date:	CUSTOMER	
GROUP		U.Pardos	Drawn: 18-10		
			Checked: 18-10		
Scale:		Subs. Draw N°:		Traction lift 900Kg	
S.I.E.		Replaced by:		Faleasa FABRICACION DE ELEVADORES S.L.	
Date	Modification	Ed.:0			