VERTICAL SECTION

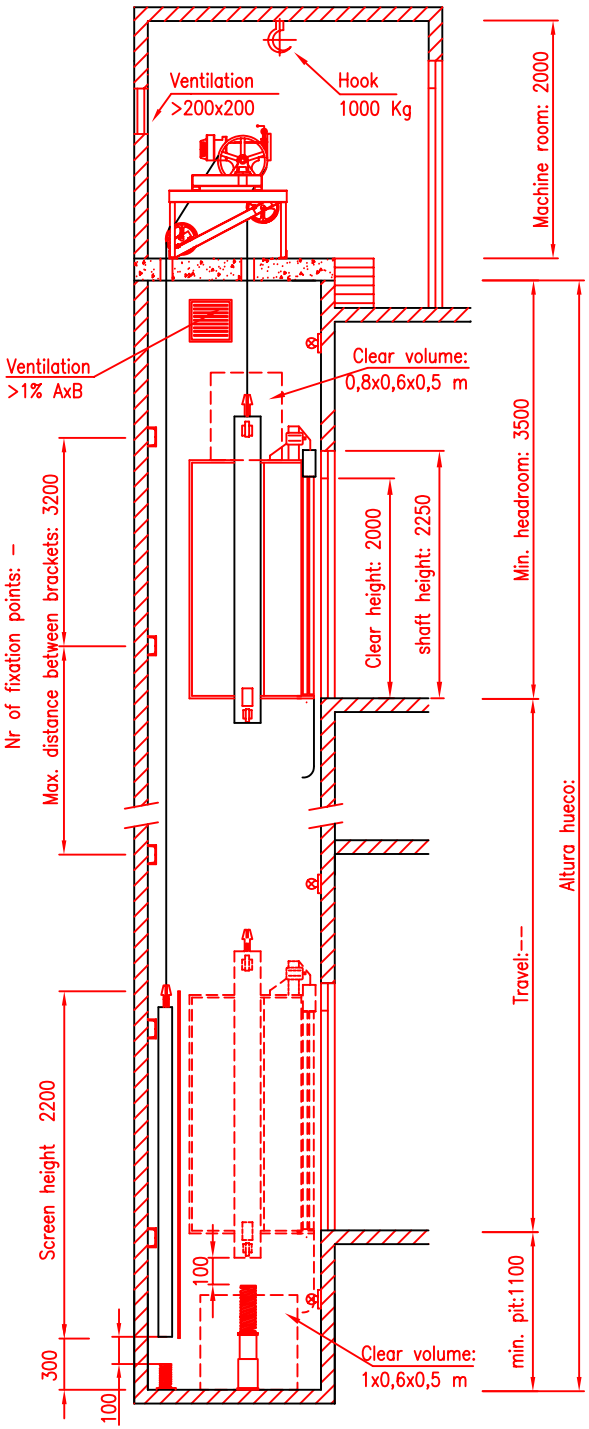

SHAFT PLAN

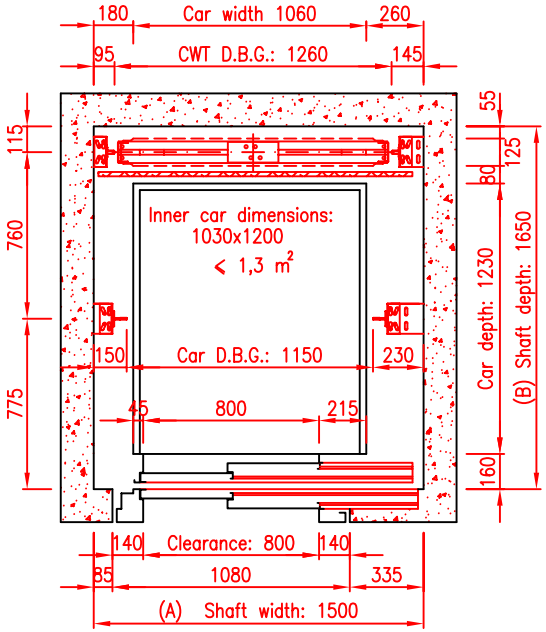

PIT

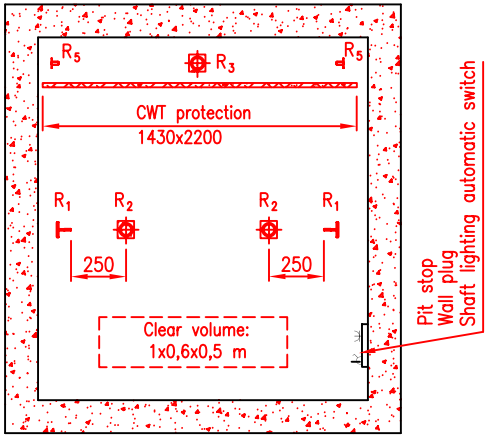

CHARACTERISTICS	
LOAD (Q):	450 Kg
CAR WEITHT (P):	480 Kg
TOTAL WEIGHT (P+Q):	930 Kg
PERSONS:	6
RATED SPEED:	1/0,25 m/s
TRAVEL:	---- mm
STOPS:	–
MACHINE DENOMINATION:	-------
TRACION PULLEY:	ø520
DEFLECTION PULLEY:	ø320
SUSPENSION:	1:1
ROPES:	4xø8
OVERSPEED GOV. ROPE:	ø6
CAR GUIDE RAIL:	70/65/9
CWT GUIDE RAIL:	45/35/15
CAR SAFETY GEAR:	F2S
CWT SAFETY GEAR:	PI–12
CAR BUFFER:	ø100x80
CWT BUFFER:	ø100x80
MACHINE POWER:	7,5 CV
POWER VOLTAGE:	380 V
LIGHTING VOLTAGE:	220 V
PHASES:	3
NOMINAL CURRENT:	14.2 A
START CURRENT:	46.6 A
CONTROLLER:	-----
R1:	11.223 N
R2:	35.708 N
R3:	26.879 N
R4:	475 N
R5:	

N° OF PIECES				DENOMINATION			POS. MATERIAL WEIGHT	DRAWING
4	3	2	1	2008	Date:	Name:	CUSTOMER	FELESA FABRICACION DE ELEVADORES S.L.
GROUP				Drawn:	18–10	J.Pardos	-------	
				Checked:	18–10			

Scale:		
S:E	Traction lift 450Kg	------

Date	Modification

Subs. Draw N°: | Replaced by: | Ed.:0