
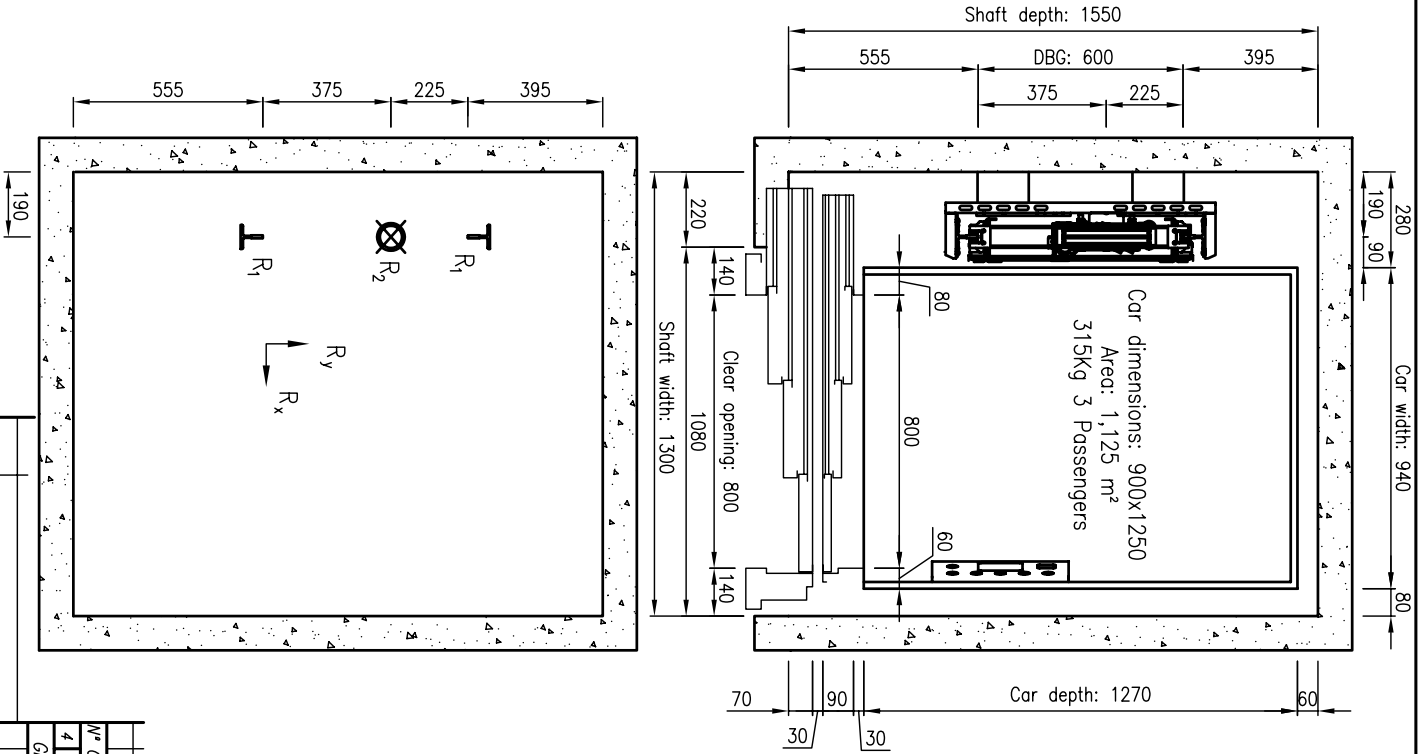


*Distance between the higher part of the head pulley and the shaft roof

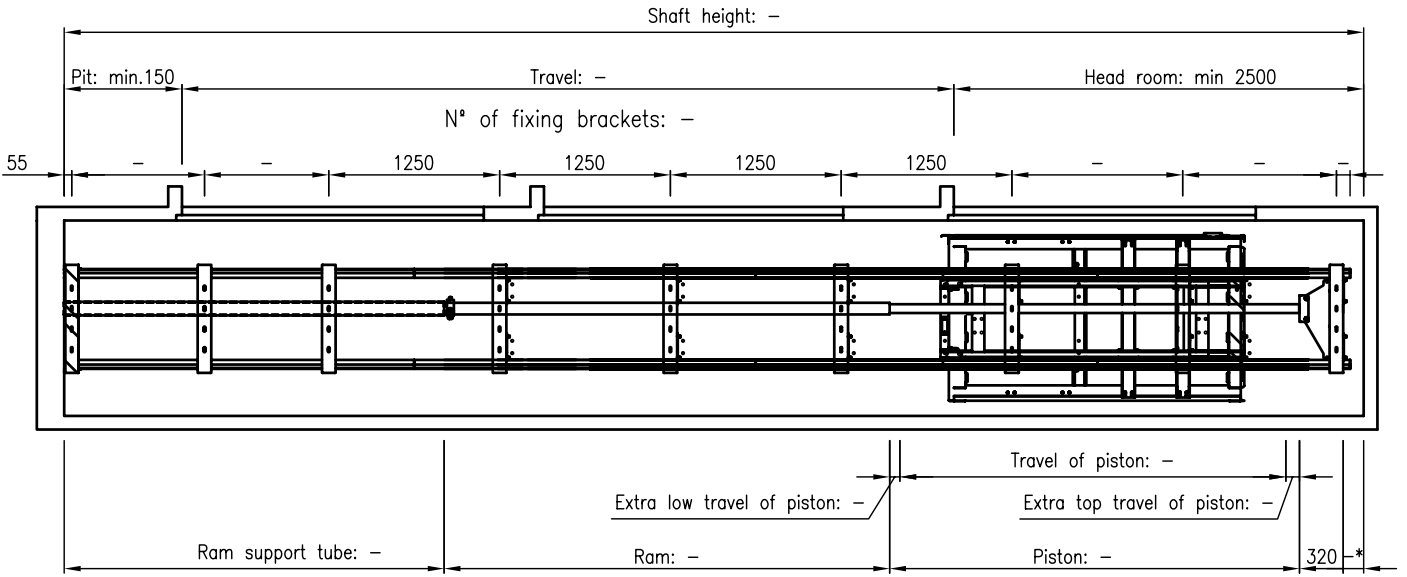

Date	Modification

N° OF PIECES	4	Date	Name	DENOIMINATION	POS. MATERIAL	WEIGHT	DRAWING
	3						
GROUPS	1	Date	Name	DENOIMINATION	POS. MATERIAL	WEIGHT	DRAWING
	2						
Scale:				SHAFT LAYOUT			
S-E				315Kg 3Passengers (Handic.)			
Subs. Draw N°				Replaced by:			
Ed:0				Falesa			
FABRICACION DE ELEVADORES S.L.				CUSTOMER			

CHARACTERISTICS	
LOAD:	315 Kg
PASSENGERS:	3
RATED SPEED:	0,15 m/s
TRAVEL:	- mm
STOPS:	-
ACTING:	2:1
HEAD PULLEY:	ø250
TRACTION ROPES:	2x9ø
CAR GUIDES:	G7 (70/65/9)
CAR SAFETY GEAR:	P1-12
PISTON:	65/7,5
HYDRAULIC EQUIPMENT:	GMV HL6000
MOTOR POWER:	3 Cv
PUMP FLOW:	15 l/min
START:	DIRECT
NOMINAL CURRENT:	18 A
START CURRENT:	58 A
R1:	12.000 N
R2:	19.000 N
Rx:	4.000 N
Ry:	1.100 N